

ECONOMY LIFELIGHT - ELIFE-X



SUPERIOR LIGHT OUTPUT - D40 spacing classification to cover most applications.

LONG LIFE LED - Energy efficient, Long Life. Available in economy 50,000hr LED.

LOW POWER CONSUMPTION - Energy efficient. Low 2.5 Watt power consumption.

TAMPER RESISTANT - No dome required.


The Economy Lifelight - delivers low cost maintenance and a high performance emergency lighting solution, with a D40 classification.

With an energy efficient LED lamp and reliable dual rate charge Nickel Cadmium battery support, the Economy Lifelight delivers superior light output achieving higher levels of compliance.


Retrofitting is easy with an adapter plate to suit older applications in the one box. Tamper resistant with no dome required, the Economy Lifelight is suitable for most emergency lighting applications.

SAVE TIME AND MONEY ON INSTALLATION WITH LIFELIGHT


With an impressive D40 spacing classification the Economy LIFELIGHT™ delivers higher levels of compliance.



STANDARD ECONOMY



STANDARD PREMIUM



ELIFE-X NOW DELIVERS

Based on area of 3350m² @ 2.7m ceiling height, required quantity to meet AS/NZS2293.

ECONOMY LIFELIGHT - ELIFE-X

SEGMENT - LAMP TYPE	PART NUMBER
	Single-point
ECONOMY - LED	ELIFE-X
ECONOMY - LED	ELIFE-X-SMS

ECONOMY LED

Recessed and surface mounted, LED technology, dual-rate high temperature Nickel Cadmium battery pack comes standard in the economy range, 1 year back to base warranty and comes complete with adaptor plate.


SPECIFICATIONS				
	Warranty	Power Consumption	C0	C90
ELIFE-X	1 YEAR	2.5W	D40	D40
ELIFE-X-SMS	1 YEAR	2.5W	D40	D40

SPACING TABLE & MOUNTING HEIGHTS												
Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	10m
D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.1


Based on minimum light level of 0.2 lux

HEAD DIAMETER

- 95mm
- 145mm with adaptor plate




Dimensions (mm)
Without Adaptor Plate

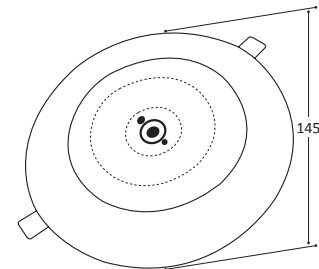


Dimensions (mm)
With Adaptor Plate

CUTOUT SIZE


- 85mm diameter (recommended)
- Will suit 70mm - 135mm with adaptor plate

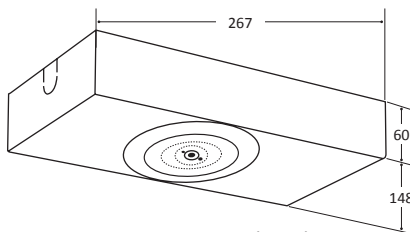

Dimensions (mm)
SMS

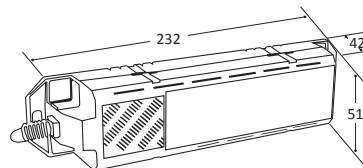

Dimensions (mm)
Ballast



Dimensions (mm)
Battery

Version: October 2014-4

Please check our website for your closest Clevertronics office and local representative. Due to changes in industry standards and Clevertronics policy of product improvement, specification details are subject to change without notice.

www.clevertronics.com.au