

Olsen ADM130 – Monitor Module

Specifications

Operating Voltage	18 to 28Vdc
Quiescent Current (max)	250µA
Alarm Current	6 mA
Supervised Line Length (max)	100m
Cable Size	1 to 4mm ²
Relative Humidity (non condensing)	95% R.H
Ambient Temperature	-5° to +45°C


The module's two-wire input is supervised for open circuit faults. An LED indicator allows visual monitoring of the module's status.

The module incorporates a magnet actuated test that checks the operation of the ADM130 electronics and fire panel interface.


Description

The ADM130 is an addressable input module that allows the connection of (normally open) hard contact detection devices to Tyco MX4428 analogue addressable systems.

Suitable hard contact devices include the Olsen T56B with Z56N base, the Olsen T54B and the Manual Call Point from Tyco (part number SU0165).

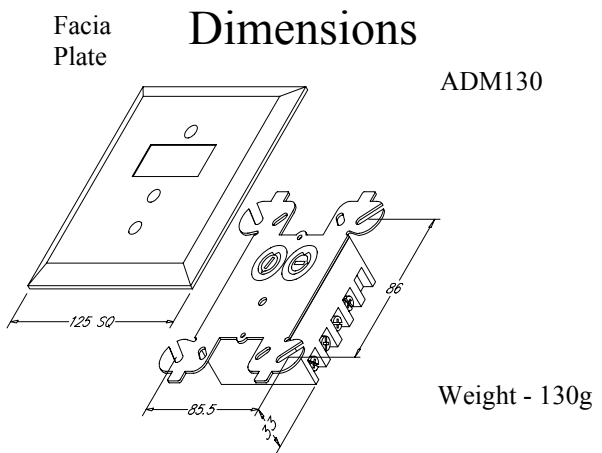

System Diagram

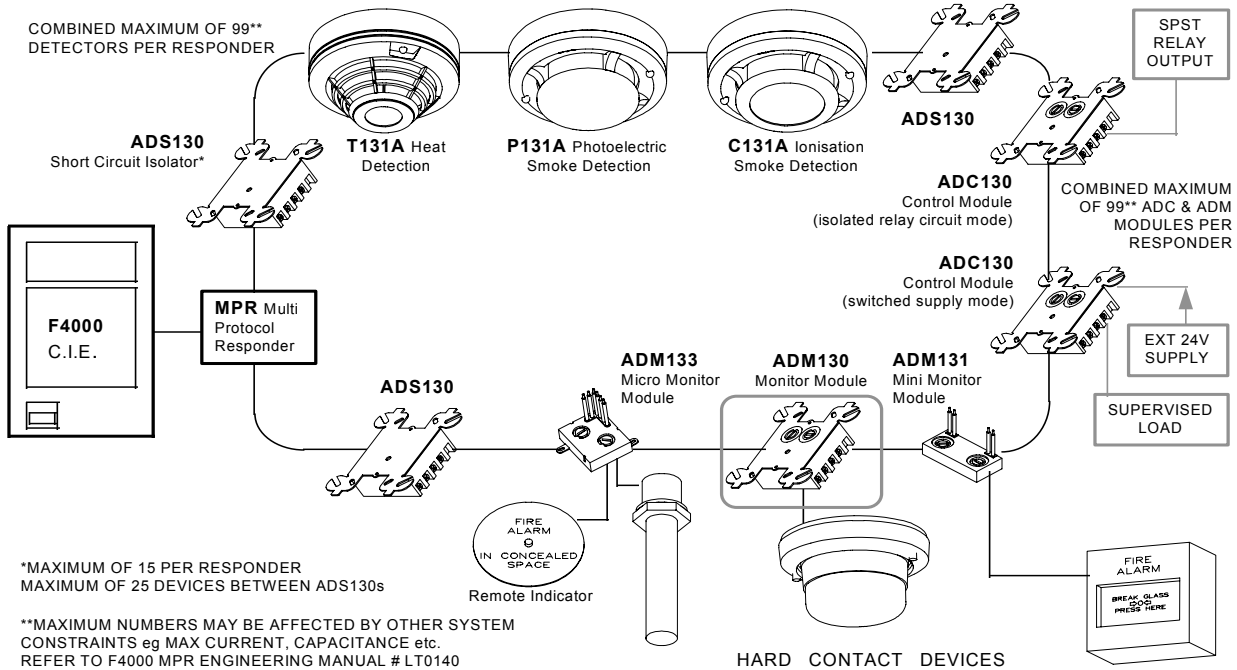

For more detailed information, please consult Tyco MX4428 manuals. Connection details are supplied with each product.