


UNIVERSAL BAFFLE FOR D51B

BAFFLE INSTRUCTIONS

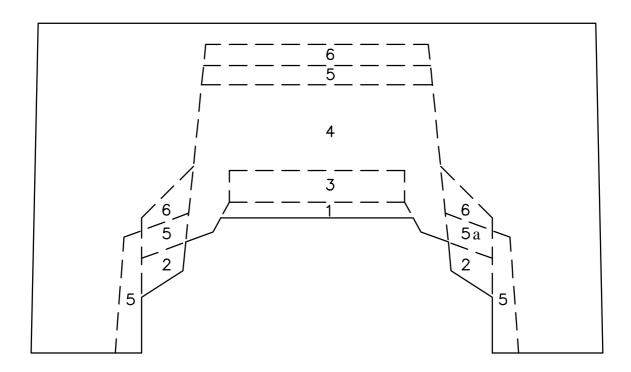

The following sections must be removed from the Universal Baffle to fit the profile of the respective detectors. Sections are removed by tearing along perforations.

DETECTOR	BASE	REMOVE
814PH	MUB	1, 2, 3
MR614	M614	1, 2, 3, 5a *
P131A	Z131	NONE
P73A	Z72B	1, 2, 3
P72A, P76B	Z72B	1, 2, 3, 4, 5, 5a, 6
P24B	Z500, Z56, Z56N	1, 3, 4
P24B	Z54B	1, 2, 3, 4, 5, 5a, 6
HOCHIKI SLK-A	YBF-RL/4AH4	1, 2
C29BEx	Z94C	1, 2, 3, 4, 5, 5a

^{*} Section 5a must be positioned over the LED indicator of the MR614 smoke detector