

WEATHERPROOF EXIT



LOWEST COST OF OWNERSHIP - Longer lasting Lithium Iron Phosphate (LFP) battery technology, coupled with lower energy consumption delivers lower maintenance and running costs.

LONG LIFE, LOW ENERGY LED - High brightness 100,000 hour LEDs for low energy and maintenance costs.

ROBUST POLYCARBONATE WEATHERPROOF - IP65 (CM), IP66/67 (WM) Polycarbonate housing for industrial uses where dust and moisture is prevalent.

JUMBO AVAILABLE - Jumbo 32m viewing distance model features energy efficient 24W PL fluorescent lamp.
- Jumbo 40m viewing distance model features energy efficient 36W PL fluorescent lamp.

The Clevertronics weatherproof range provides a wide selection of emergency exits for commercial and industrial use where moisture and/or dust is prevalent or a higher level of impact protection is required. Impact rating IK08 (Wall mount version)

The weatherproof exit is available in the LP Lithium Premium and L10 Optimum ranges which set new benchmarks for reducing maintenance and ownership costs, and compared with old NiCd and NiMH based technology is environmentally responsible.

Long life, energy efficient, high brightness LEDs deliver reliable performance.

Available in the Clevertronics range of automatic testing options including Zoneworks - Australia's number 1 computerised and networking solution.

SAVE TIME AND MONEY - UPGRADE TO CLEVERTEST™

LOWER INSTALLATION COSTS
LOWER TESTING COSTS

Emergency lights that perform their six monthly discharge tests by themselves, and indicate their status via a bi-colour flashing LED. No need for a manual test-switch.

EMERGENCY LIGHTS THAT TEST THEMSELVES!

clevertest™



WEATHERPROOF EXIT

SEGMENT - LAMP TYPE	PART NUMBER & TESTING OPTIONS				
	Single-point	Clevertest™	DATA	DALI EM	Zoneworks®
LP - Wall Mount -R	CWELED-WM-R	CWELED-CT-WM-R	CWELED-DATA-WM-R	CWELED-DALI-WM-R	CWELED-ZW-WM-R
LP - Ceiling Mount	CWELED-CM	CWELED-CT-CM	CWELED-DATA-CM	CWELED-DALI-CM	CWELED-ZW-CM
L10 - Wall Mount -R	LWELED-WM-R	LWELED-CT-WM-R	LWELED-DATA-WM-R	LWELED-DALI-WM-R	LWELED-ZW-WM-R
L10 - Ceiling Mount	LWELED-CM	LWELED-CT-CM	LWELED-DATA-CM	LWELED-DALI-CM	LWELED-ZW-CM

For directional options please add L or R to above codes for Left or Right Arrow i.e CWELED-WM-RL

LP PREMIUM LED

Wall or surface mounted exit, 100,000 hour LED, environmentally responsible, low maintenance, long life Lithium Iron Phosphate battery, 2 year back to base warranty, single or double sided, running man pictogram or EXIT decal, directional options indicated.

L10 OPTIMUM LED

Wall or surface mounted exit, 100,000 hour LED, state of the art environmentally responsible Lithium Iron Phosphate battery with no heavy metals or carcinogens, 4 year back to base warranty, twice the service life of the Nickel Cadmium battery, one of the most energy efficient exit lights on the market.

TESTING OPTIONS




clevertest Exit and Emergency luminaires automatically test every six months.


DALI EM Smooth integration and networking with DALI Lighting Control Systems.

ZONEWORKS A real-time, automatic monitoring and testing facility for emergency luminaires.

	SPECIFICATIONS			
	Warranty	Power Consumption	C0	C90
LP - Wall Mount	2 YEARS	2.7W	E1.25	E1
LP - Ceiling Mount	2 YEARS	2.7W	D2	D1.25
L10 - Wall Mount	4 YEARS	2.7W	E1.25	E1
L10 - Ceiling Mount	4 YEARS	2.7W	D2	D1.25

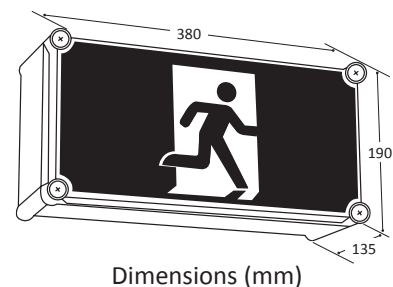

Classification	SPACING TABLE & MOUNTING HEIGHTS									
	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	
C1	2.8	2.5	2.1	1.3	-	-	-	-	-	
D1.25	4.0	3.8	3.4	2.9	2.0	-	-	-	-	
D2	5.2	5.2	5.0	4.8	4.4	4.0	3.1	-	-	
E1	3.8	3.6	3.2	3.6	-	-	-	-	-	
E1.25	4.2	4.2	4.0	3.6	4.0	3.0	-	-	-	

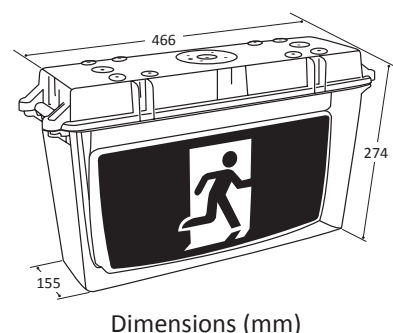

Based on minimum light level of 0.2 lux

Maximum allowed mounting height is 2.7m but for exceptions see AS/NZS2293.1 2005

Version: June 2014-3

Please check our website for your closest Clevertronics office and local representative. Due to changes in industry standards and Clevertronics policy of product improvement, specification details are subject to change without notice.

www.clevertronics.com.au