


Features:

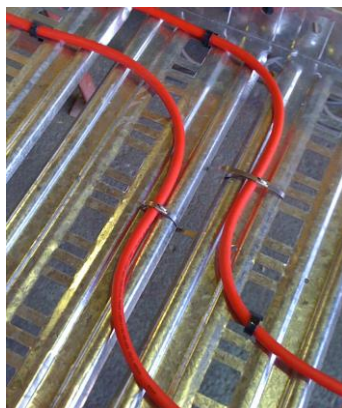

- 304 stainless steel
- Ball bearing locking mechanism
- 200mm & 360mm lengths
- As required by
 - AS 3013
 - AS1670
 - AS1668
 - AS2118
- Convenient bags of 100 PCS
- Independently tested to AS/NZS 3013 Appendix C
- 2 HR Fire Rating
- ActivFire Certified
- PVC Coated Option
- 316 stainless steel option

Australian standards require that fire rated cables are mechanically fixed to trays with the use of steel ties.

FireSense stainless steel cable ties are suitable for use with fire rated cables in accordance with AS 3013, AS 1670, AS2118 & AS1668. Independent approval can also be provided to Section C of AS/NZS 3013 as well as ActivFire Certification for the SST-200 / SST-360.

FireSense stainless steel cable ties come in 2 convenient lengths of 200mm & 360mm for cable bundle sizes of 50mm & 95mm respectively.

PVC coated and a higher grade 316 stainless steel option are also available. – **Note these two options are not ActivFire approved.**

Please consult your cable supplier for tie spacing as this may vary from cable to cable.



Ordering info:

Part No.	Length	Width	Qty Per Pack	Max. Cable Bundle Dia.	Tensile Strength	Stainless Steel Grade	ActivFire No.
SST-200	200mm	4.6mm	100pcs	50mm	46kgs	AISI.304	AFP-2417
SST-360	360mm	4.6mm	100pcs	95mm	46kgs	AISI.304	AFP-2417

PVC Coated:

SST-200C	200mm	4.6mm	100pcs	50mm	46kgs	AISI.304
SST-360C	360mm	4.6mm	100pcs	95mm	46kgs	AISI.304

High Grade stainless steel option:

SST-200-316	200mm	4.6mm	100pcs	50mm	46kgs	AISI.316
SST-360-316	360mm	4.6mm	100pcs	95mm	46kgs	AISI.316